

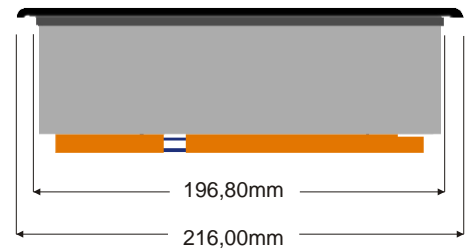


J1-K31-F

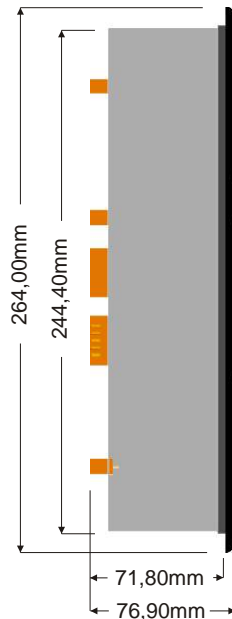

q-move your mind

J1-K31-F

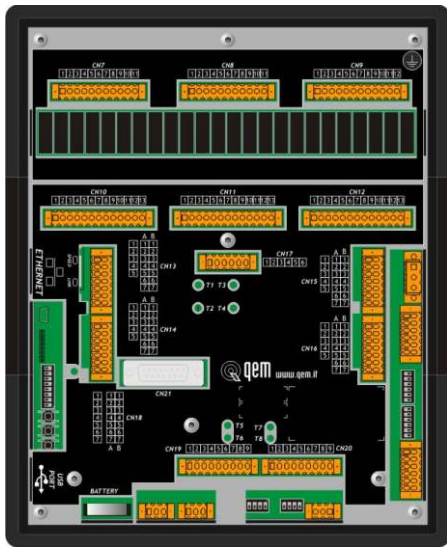

Characteristics

- 7" TFT display - 800x480 resolution - high brightness (400cd/m²)- led backlight
- 24Vac/dc supply voltage
- Button panel
- 14 Custom function buttons
- 1 Can port for communication with CAN-OPEN modules (Ds401-402 standard)
- 1 Multistandard R232/422/485 serial port - modbus or general protocol
- 1 MMC or SD card slot
- 8 200KHz Push-Pull or Line Driver counters
- 8 Analog outputs (+/-10V, 16bit)
- 32 Digital inputs
- 2 Frequency meter inputs
- 32 Protected static outputs (2A, 24Vdc)
- 4 Analog inputs (12bit)
- Flash memory
- Clock with calendar function
- Built-in buzzer

Options

- 1 CAN port
- 1 Multistandard R232/422/485 serial port - modbus or general protocol
- 1 RS485 port (AUX)
- 1 Ethernet port
- 4 PP/LD STEP/DIRECTION outputs
- 24 Relay outputs (instead of static outputs)



Quality in Electronic
Manufacturing

QEM S.r.l. - S.S. 11, km 339 - Località Signolo - 36054 - Montebello Vic. - Vicenza - Italy
Tel. +39 0444 440061- Fax +39 0444 440229 - E-mail: info@qem.it - http://www.qem.it