



R401B

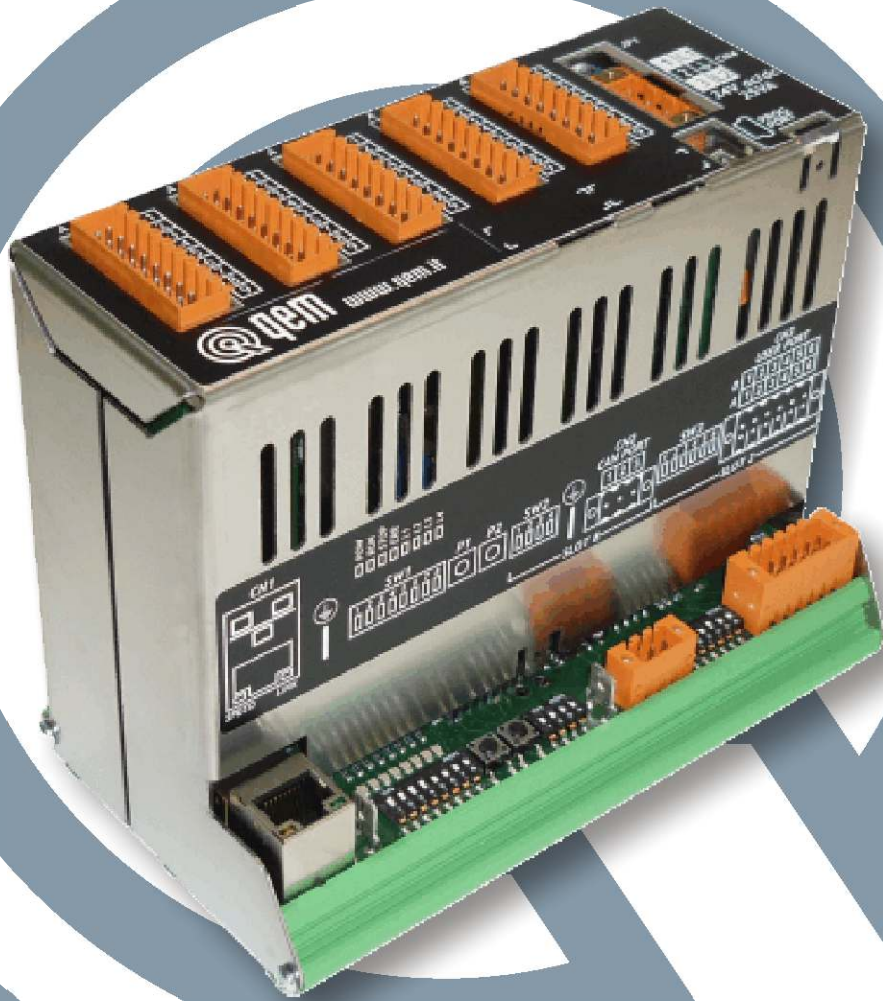

protect your space

R401B

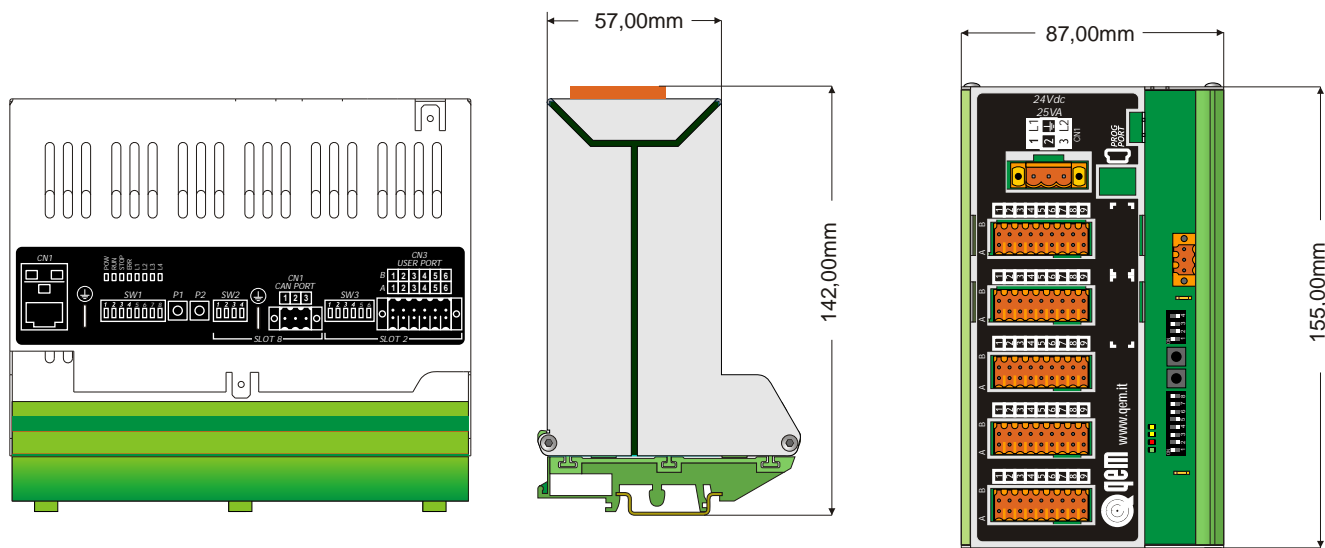

Characteristics

- Motion Controller - 87x155x142mm (without connectors)
- 24Vdc power supply
- 1 Can port for communication with CAN-OPEN modules (Ds401-402 standard)
- 1 Multistandard R232/422/485 serial port- modbus or general protocol
- 1 MMC or SD card slot
- Push-Pull or Line Driver counters (200KHz)
- Analog outputs (+/-10V, 16bit)
- Digital inputs
- Frequency meter inputs
- Protected static outputs (500mA, 24Vdc)
- Analog inputs (12bit)
- Flash memory
- Clock with calendar function
- 1 extra multistandard R232/422/485 serial port - modbus or general protocol
- 1 Ethernet port
- power outputs for direct command of dc motors (1/2A, 24Vdc)
- PT100 and thermocouple inputs
- DC motor command outputs (1-10A, 24/48Vdc)



Quality in Electronic
Manufacturing

QEM S.r.l. - S.S. 11, km 339 - Località Signolo - 36054 - Montebello Vic. - Vicenza - Italy
Tel. +39 0444 440061- Fax +39 0444 440229 - E-mail: info@qem.it - http://www.qem.it