

C1-R31-F



AC-DC POWER



ETHERNET



Teleassistenza




Porta CAN



Memory Card
MMC / SD




Stepper outputs

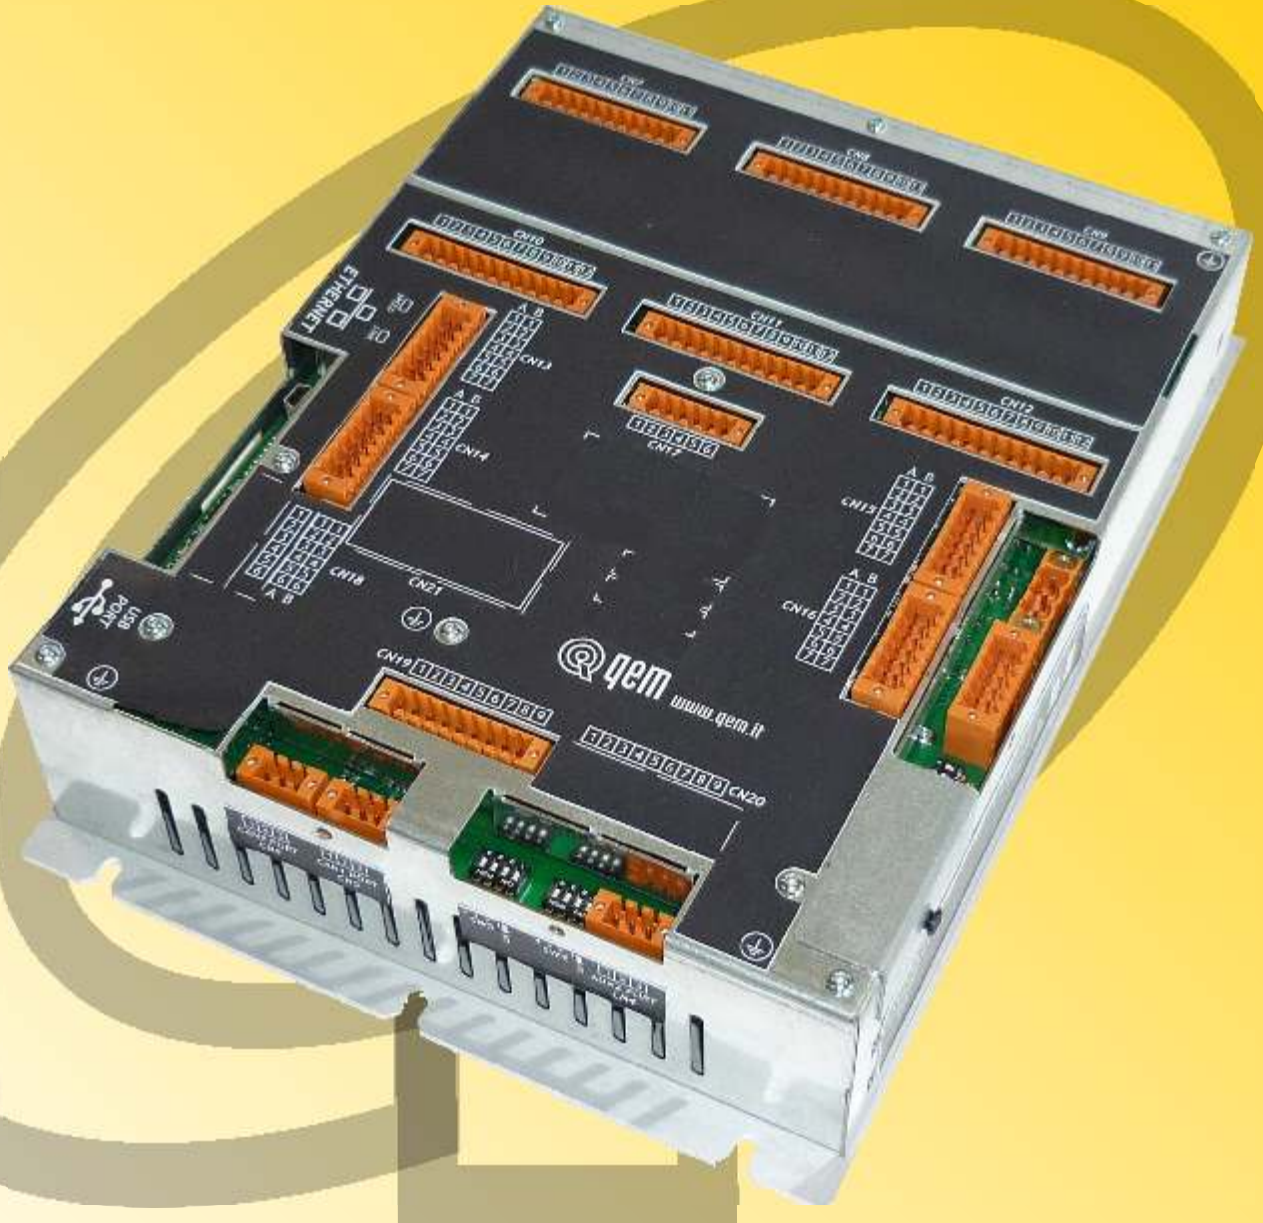

Specifications subject to change without notice. However, OEM does not assume liability for errors or inaccuracies. COPYRIGHT 2009 OEM Srl. All rights reserved. Printed in Italy.

q-move your mind

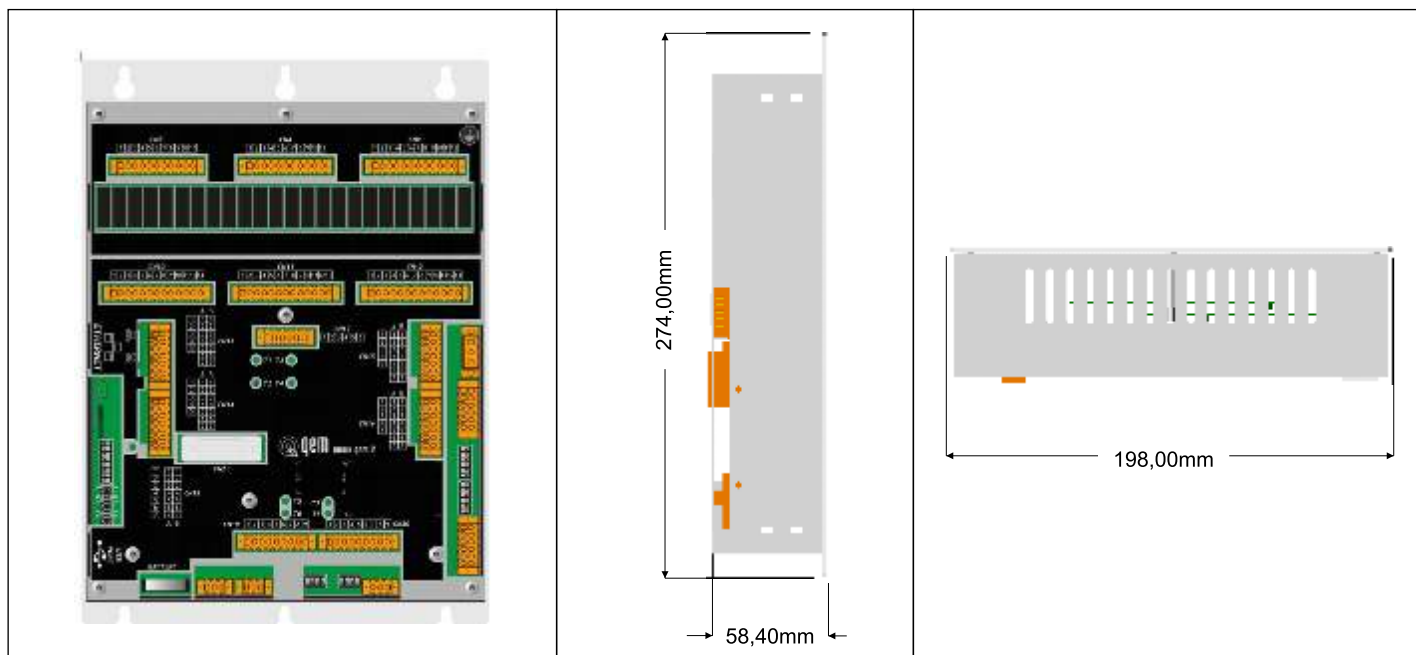

Caratteristiche generali

- Motion Controller da retroquadro 198x274mm
- Tensione di alimentazione 24Vac/dc
- 1 porta Can per dialogare con moduli CAN-OPEN (standard Ds401 - 402)
- 1 porta seriale multistandard R232/422/485 con protocollo modbus o generico
- 1 lettore per MMC o SD card
- 4 conteggi da 200KHz Push-Pull o Line driver
- 4 uscite analogiche +/-10V a 16bit
- 24 ingressi digitali
- 1 ingresso per frequenzimetro
- 24 uscite statiche a 2A - 24Vdc protette
- 2 ingressi analogici a 12bit
- Memoria dati a semiconduttore (non necessita di batteria)
- Orologio con funzione di calendario

Opzioni disponibili

- 1 porta CAN
- 1 porta seriale multistandard R232/422/485 con protocollo modbus o generico
- 1 porta RS485 (AUX)
- 1 porta per tastiere esterne

Opzioni su richiesta

- 1 porta Ethernet
- 1 porta USB
- 4 uscite per comando STEP/DIREZIONE PP oppure 2 uscite STEP/DIREZIONE differenziali
- 24 uscite a relè (in alternativa alle uscite statiche)
- 2° ingresso per frequenzimetro